

your first move.....

ON RECEIPT OF YOUR FURNITURE FOLLOW THIS PROCEDURE ON ALL NATURAL WOODEN SURFACES

1. shake the PRONATURE PLANT SOAP well and mix a small qty 1:5 with water. ensure that furniture is free of dust.
2. apply the dilute solution with a cloth to the surface and end grain of the wooden surfaces. allow to penetrate and dry.
3. scour lightly with a scotchbrite scouring pad to render smooth.

NOTE - the early application of the oil rich plant soap helps prevent premature cracking. you can repeat this process as frequently as you like to nurture the timber.



natural timber

maintenance - ideally 4 x a year. min. 1x year.

1. wet the wood and scrub with scotch brite pads in the direction of the grain of wood.
2. wash off the dirt and loose wood pulp residue.
3. mix PRONATURE PLANT SOAP 1:5 water. (200ml plant soap to 1 L water).
4. apply to the surface and scrub in direction of the grain, with the scourer.
5. areas with severe marks: agitate across the grain, then with the grain. rinse off and allow to dry.
6. lightly scour timber with a DRY scotchbrite scourer.


commercial situations i.e. restaurants etc.

1. mix PRONATURE PLANT SOAP 1:2 with water. (500ml plant soap to 1 L water).
2. wipe surfaces with a cloth and dilute solution between sittings. this will create a slight barrier on the surface which will help prevent penetration of spilt food and drinks.

oiled timber

maintenance - 1 x year (or when the timber appears to be dry)

1. scour lightly with scotchbrite scourers in direction of grain of wood to remove old oil.
2. wipe surfaces clean of all loose dirt.
3. apply PRONATURE OUTDOOR OIL lightly with a soft lint free cloth or brush.
4. **IMPORTANT** - remove any excess oil with a dry cloth after approx. 15 min.



rust metal

maintenance - 1x year or when signs of flaking rust.

1. scour frames with scotch brite pads to remove loose rust and brush clean.
2. apply PRONATURE WAX to the metal frame with a cloth and rub dry.
3. **NOTE** - the wax is NOT FOR USE on timber outdoors
4. **OIL** the articulating parts of the chairs and exercise the folding action 2 x a year



galvanised metal

NOTE - furniture in close proximity to the sea will show a formation of powdery white crystals as the galvanised metal oxidises.

build up of this residue will be difficult to remove if left unattended

maintenance - washing 1x year

1. remove this residue in early stages with a high pressure hose or scour manually with scotchbrite pad and water.

2. OIL the articulating parts of the chairs and exercise the folding action 2 x a year



stone surfaces

maintenance

1. wipe up spillages promptly - always clean the table surface after meals with a damp cloth.
2. wash the stone often (pref. with RAINWATER that you've saved) and occasionally with very dilute PRONATURE PLANT SOAP.
3. apply BELLINZONI SPRAY POLISH sparingly, but regularly with a soft cloth to the clean surface.

frequency: domestic - minimum 1 x a month
commercial minimum 1 x a week

DO NOT use harsh scouring cleaning materials or strong detergents.



spare parts

in the event of complete neglect - replacement wooden components are available for all models of chairs.

in the event of metal frames breaking by accident or in the course of normal use, axis rivets can be replaced and things straightened out. we will require that you bring the patient to the showroom or factory.




further info and care

please consult our website <http://hopegf.com>

all maintenance products can be purchased from the hope showroom, selected hardware stores or from our website

136 lower main rd, observatory | 021 448 7485 | info@hopegf.com

•hope•

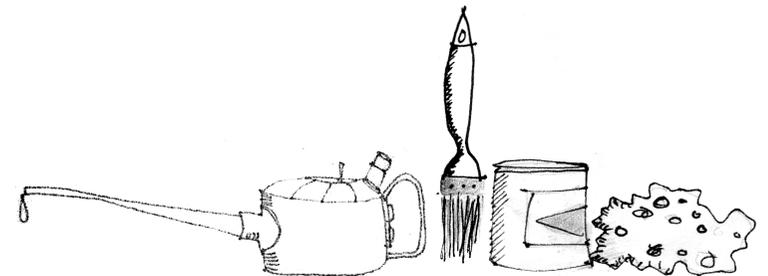

furniture maintenance guide